



AW-FGT-260D-380

24xFE PoE + 2xGE ComboUnmanaged Switch

Extend PoE up to 250 meters at 10 Mbps •
Surge Protection 6KV

- 24*10/100Mbps PoE RJ45 Ports
- 2*10/100/1000Mbps Combo Ports
- IEEE 802.3af/at Compliant
- Supports PoE Power up to 30W for each PoE Port
- 6KV PoE Surge Protection each Port
- 20% Range of Input Voltage Tolerance (280VAC 4Hr, 300VAC 1min)
- Circuit Protection Prevents Power Interference between Ports
- Detects PoE PD (power device) Automatically
- ST Mode Reaches PoE Camera up to 100M @ 100Mbps via any PoE Port
- VLAN Mode Isolates each port to Prevent Broadcast Storm
- EX Mode Reaches PoE Camera up to 250M @ 10Mbps via EX PoE Ports




Overview


VIVOTEK's AW-FGT-260D-380, equipped with DIP switch provides ST Mode as STandard mode, ST VLAN as STandard VLAN mode, and EX Mode as EXtend mode. Especially designed for IP Surveillance applications, the camera provides standard 802.3af/at PoE functions in ST mode, while EX mode transmits data & power on one single cable up to 250 meters at 10 Mbps via 8 EX ports for long-reach PoE IP cameras. The AW-FGT-260D-380 also adds an extra 10% range of input voltage tolerance (280VAC 4Hr, 300VAC 1min), and lightning surge protection of AC power & PoE surge protection to prevent the damage caused by unstable outside AC power, lightning surges, and power spikes. These unique features reduce costs associated with the replacement of damaged units.

Application

• ST Mode

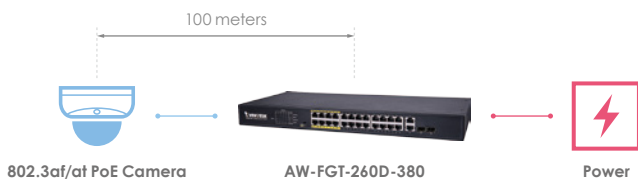

• EX Mode

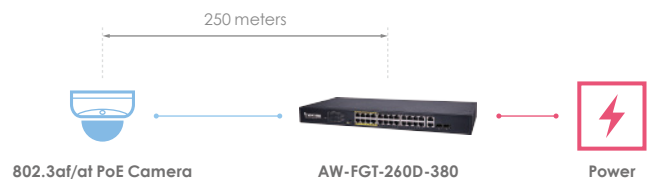

Range Guide

802.3af/at PoE IP Camera

Any Port @ ST Mode

100M @ 100Mbps

EX Port @ EX Mode

250M @ 10Mbps

*EX Mode: Cat.6 or better UTP/STP cable is highly recommended. Low quality cables will seriously limit the cabling distance.

Technical Specifications

Model	AW-FGT-260D-380
Networking Specifications	
10/100 Mbps RJ45 PoE Port	24
Gigabit RJ45/SFP Combo Ports	2
EX Mode PoE (250M@10Mbps)	8
VLAN mode	Supported
Ethernet Performance	
Switching Capacity	8.8 Gbps
Mac Table	16 K
Packet Forwarding rate	6.5Mpps
Auto-MDI/MDI-X, Auto-Negotiation	Supported
Power Specifications	
Power Input Voltage	AC 100 ~ 240V, 50/60Hz 5A (Max)
Max. PoE Output Power	Per Port 55VDC, Max. 30W
Total PoE Power Budget	370W
IEEE 802.3af/at	Supported
Power Pin Assignment	1/2(+), 3/6(-)
PoE PD Auto Detection	Supported
Surge Protection	Contact 6KV, Air 8KV
General	
Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Storage Temperature	-40°C ~ 70°C (-40°F ~ 158°F)
Operating Humidity	10% to 90% non-condensing
MTBF	>50000 hours
Dimensions	440 (L) x 207 (W) x 44 (H) mm
Weight	3.25 KG
Warranty	24 Months
Certifications	
EMC	CE, FCC, VCCI, LVD

Dimensions

